


20+9W / 1775+740lm / 4000K / On/Off /
Diffuse / batwing / 1399mm

62318

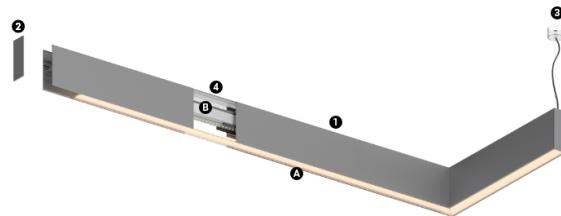

Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules

Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K

Light Source

Luminaire


Power 20+9W 24,4+11,3W

Flux 3775+1180lm 1775+740lm

Efficiency 171lm/W 70lm/W

LOR - 51%

UGR - <22



Beam angle
Diffuse / batwing

Application



Weight
0,51Kg

mm

Finishes

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and E

Model Identifier 89603212, 89603217, WU-M-594-840

