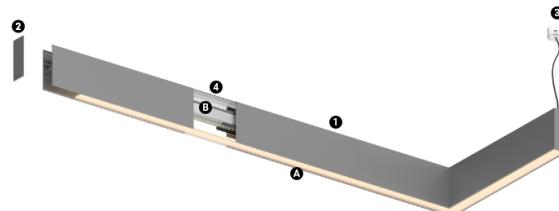


34+20W / 3300+1480lm / 4000K / DALI /
Diffuse / batwing / 1399mm

62327



Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

Diffuser

- A Polycarbonate frost diffuser

Light Source

- B LED Modules



Design: O/M

LED light source with good colour consistency and long operation lifespan.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K
mm

	Light Source	Luminaire
Power	34+20W	40+24,4W
Flux	6500+2360lm	3300+1480lm
Efficiency	164lm/W	74lm/W
LOR	-	54%
UGR	-	<25

Beam angle
Diffuse / batwingWeight
0,6Kg

Finishes

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class C
and E

Model Identifier 89603212, 89603217, WU-M-594-840

