

45W / 2300lm / 4000K / On/Off / Diffuse
indirect / 1560mm

62370



Design: Eduardo Souto de Moura
Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.
Frosted acrylic diffuser with user friendly clipping system.
Steel end caps with textured electrostatic 100% polyester paint.
Frosted acrylic diffuser for indirect light.
Three-phase track (On/Off or DALI) for installing spotlights.
Fitting accessories ordered separately.

LED CRI>80 />50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power	45W	5750lm	2300lm
Flux	5750lm	128lm/W	35lm/W
Efficiency	128lm/W	-	40%
LOR	-	-	<25
UGR	-	-	<25




Beam angle
Diffuse indirect

Application



Weight
7Kg

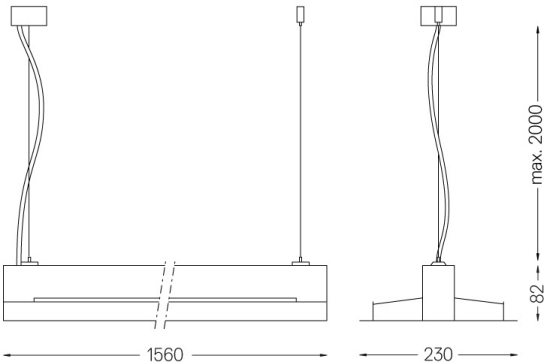

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

- 54034 Clear base
Ø60x35mm
- 54080 Aluminium base
Ø60x37mm