




Design: Eduardo Souto de Moura  
Pendant luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser with user friendly clipping system.  
Steel end caps with textured electrostatic 100% polyester paint.  
Frosted acrylic diffuser for direct light and indirect light.  
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




LED 3000K	Light Source	Luminaire
Power	23+45W	33+65W
Flux	2875+5750lm	1150+2300lm
Efficiency	127lm/W	35lm/W
LOR	-	40%
UGR	-	<25




Beam angle  
Diffuse Direct/  
Indirect

Application



Weight  
7Kg

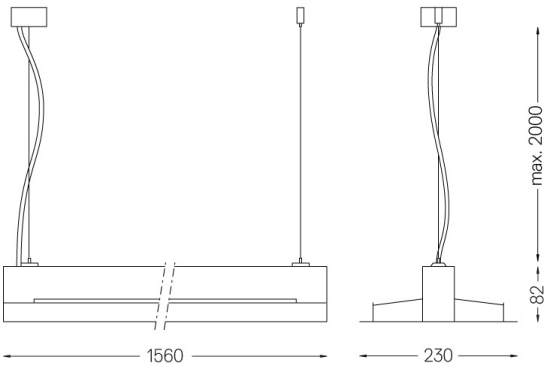

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

54034 Clear base  
Ø60x35mm

54080 Aluminium base  
Ø60x37mm