Tubo Evo

59W / 3780lm / 3000K / On/Off / Elliptical 22×47° / 1539mm

62455

Design: O/M
Surface luminaire with tubular shock-resistant clear polycarbonate diffuser and anti-condensation system comprising a valve that prevents condensation within the luminaire without affecting its high level of protection.
End caps in clear polycarbonate with marked installation angles.
Optic system with acrylic lens.
Equipped with 1m cable (H05RN-F) and a metallic cable gland.
Fitting accessories and IP68 connector supplied separately.

LED CRI>90 />50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP67 | IK08| 230Vac | 50/60Hz

LED 3000K	Light Source	Luminaire
Power	**59W**	**69,4W**
Flux	**5790lm**	**3780lm**
Efficiency	**98lm/W**	**54lm/W**
LOR	**-**	**65%**
UGR	**-**	**<13**



Beam angle
Elliptical 22×47°

Application

Weight
1,4Kg

mm

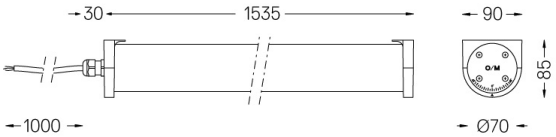

Finishes
.20 Clear

Mandatory
43707 Surface fitting acessory

Optional
43430 IP68 Connector
4 poles

This page was generated on 2026-02-04. Click here for the latest version.

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419