O975
Surface/Pendant

51W / 4100lm / 3000K / On/Off / Diffuse / 1160mm

62704

Design: Eduardo Souto de Moura
Surface or pendant luminaire with housing made of anodised aluminium profile with matt or textured-paint finish and frosted polycarbonate diffuser with user friendly clipping system.
5mm frosted polycarbonate end caps.
Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP44 | IK07 | 230Vac | 50/60Hz

LED 3000K	Light Source	Luminaire
Power	**51W**	**60W**
Flux	**5850lm**	**4100lm**
Efficiency	**115lm/W**	**68lm/W**
LOR	**-**	**70%**
UGR	**-**	**<22**



Beam angle
Diffuse

Application

Weight
1,86Kg

mm

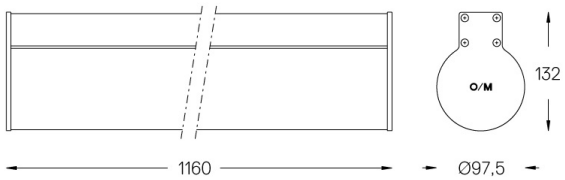

Finishes

- **.01** White / RAL 9010
- **.02** Black / RAL 9005
- **.10** Anodised aluminium

Mandatory
44070 Pendant fitting acessory
Ø60x35mm
44060 Clear base
Ø60x35mm

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419