Tubo Evo

9.6W / 1300lm / 4000K / DALI / Super spot 10° / 535mm

63132

Design: O/M
Surface luminaire with tubular shock-resistant clear polycarbonate diffuser and anti-condensation system comprising a valve that prevents condensation within the luminaire without affecting its high level of protection.
End caps in clear polycarbonate with marked installation angles.
Optic system with acrylic lens.
Equipped with 1m cable (H05RN-F) and a metallic cable gland.
Fitting accessories and IP68 connector supplied separately.

LED CRI>80 />50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP67 | IK08| 230Vac | 50/60Hz

LED 4000K	Light Source	Luminaire
Power	**9.6W**	**12W**
Flux	**1540lm**	**1300lm**
Efficiency	**160lm/W**	**108lm/W**
LOR	**-**	**84%**
UGR	**-**	**<10**



Beam angle
Super spot 10°

Application

Weight
0,5Kg

mm

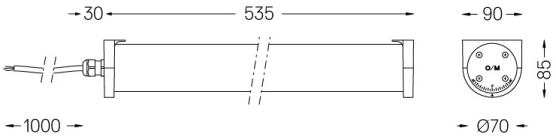

Finishes
.20 Clear

Mandatory
43707 Surface fitting acessory

Optional
43431 IP68 Connector
5 poles

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

This page was generated on 2026-02-04. Click here for the latest version.