

46W / 5200lm / 4000K / DALI / Flood 65° /
2899mm


63161

Compatibility with other modules must be confirmed
with support@om-light.com

Design: OM + Bartenbach
GmbH

Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

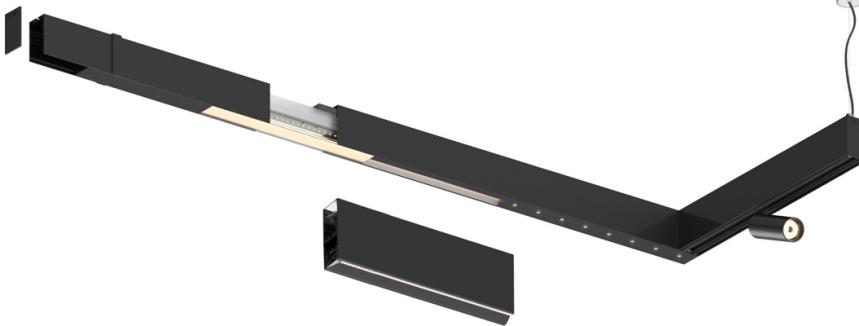

4000K

Light Source

Luminaire

Power

46W

54W

Flux

6500lm

5200lm

Efficiency

141lm/W

96lm/W

LOR

-


0.8

UGR

-

<16

Beam angle
Flood 65°



Application

Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

