


33W / 3400lm / 3000K / DALI / Wide flood
76° / 2880mm

63170

Product timing available by request

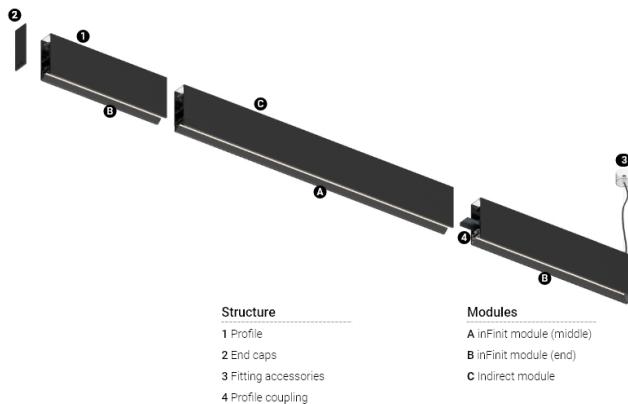

Design: OM + Bartenbach
GmbH

Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



3000K

Light Source

Luminaire


Power **33W** **38,8W**

Flux **4200lm** **3400lm**

Efficiency **127lm/W** **88lm/W**


LOR **-** **81%**

UGR **-** **<13**



Beam angle
Wide flood 76°

Application



Weight

mm

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com

