


27W / 2880lm / 4000K / DALI / Wide flood
76° / 2304mm

63174

Product timing available by request

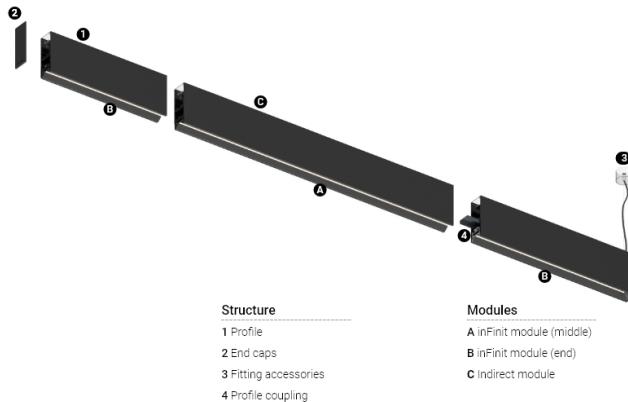

Design: OM + Bartenbach
GmbH


Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz




4000K

	Light Source	Luminaire
Power	27W	31,7W
Flux	3600lm	2880lm
Efficiency	138lm/W	91lm/W
LOR	-	80%
UGR	-	<13



Beam angle
Wide flood 76°

Application



Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

