

4,5W / 360lm / 4000K / On/Off / Spot 15° / ø86x210

63278




Design: O/M + Bartenbach GmbH
 Surface-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency. Orientable by 90° horizontal rotation and 330° vertical rotation. Power supply incorporated.

LED CRI>80 / >50.000h, L80/B10
 2-step MacAdam / Power supply included.
 IP20 | 230Vac | 50/60Hz




LED	4000K	Light Source	Luminaire
Power		4,5W	5,3W
Flux		620lm	360lm
Efficiency		138lm/W	68lm/W
LOR		-	58%
UGR		-	-



Beam angle
Spot 15°

Application

Weight
0,64Kg

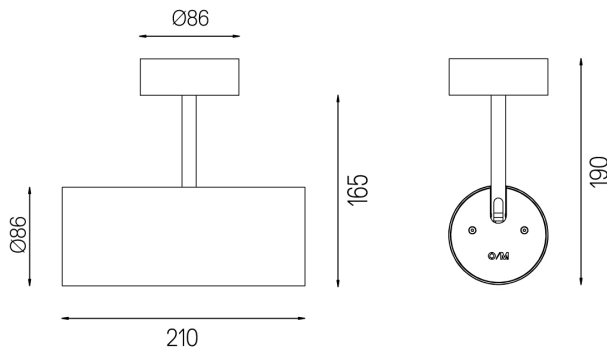

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005