

4,5W / 300lm / 3000K / On/Off / Spot 15° / ø86x210

63286



Design: O/M + Bartenbach GmbH

Track-mounted spotlight with die-cast aluminium body with electrostatic 100% polyester paint finish. Reflector built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving the maximum efficiency.


Orientable by 90° horizontal rotation and 330° vertical rotation.

Power supply incorporated.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		4,5W	5,3W
Flux		520lm	300lm
Efficiency		116lm/W	57lm/W
LOR		-	58%
UGR		-	-

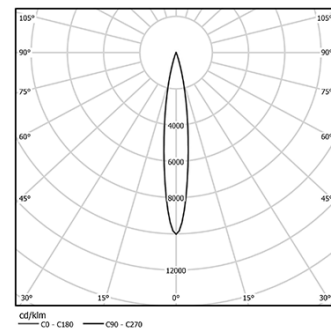


Beam angle
Spot 15°

Application

Weight
0,64Kg

mm

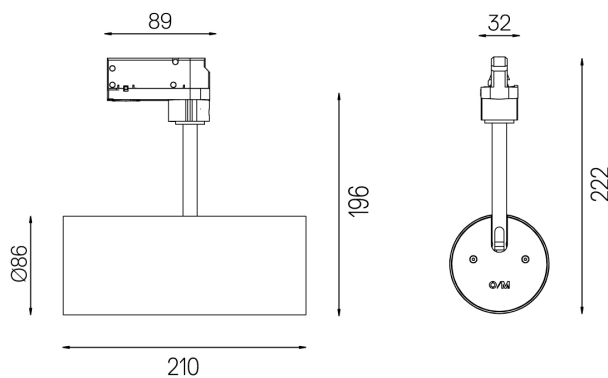

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005