


52W / 3480lm / 2700K / On/Off / Medium  
31° / 1200mm

63339

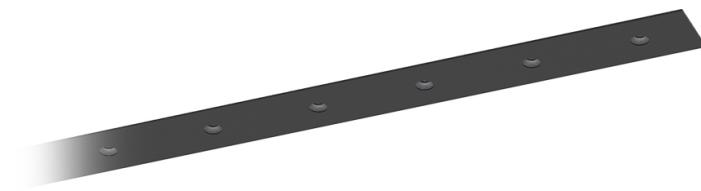


Design: O/M + Bartenbach GmbH  
Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.  
Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




	2700K	Light Source	Luminaire
Power	52W	61,2W	
Flux	4800lm	3480lm	
Efficiency	92lm/W	57lm/W	
LOR	-	73%	
UGR	-	<10	



Beam angle  
Medium 31°



Weight  
0,6Kg

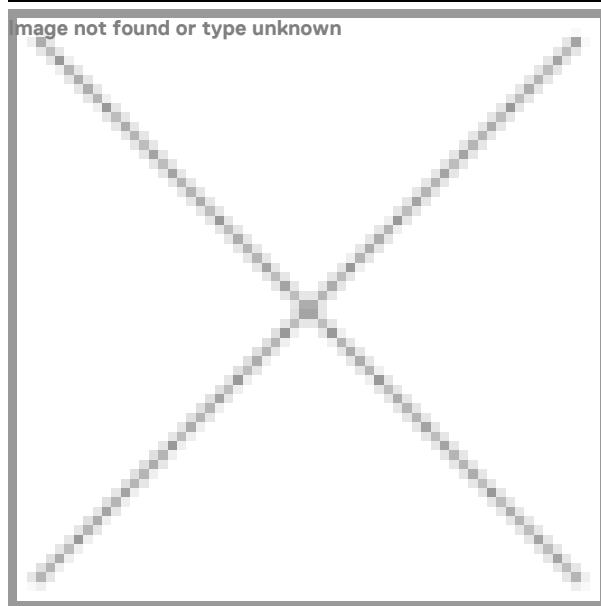

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class F  
Model Identifier 4053560342LH