


14W / 980lm / 3000K / On/Off / Flood 52° /
600mm

63376

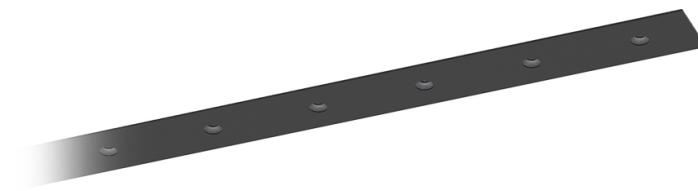

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.


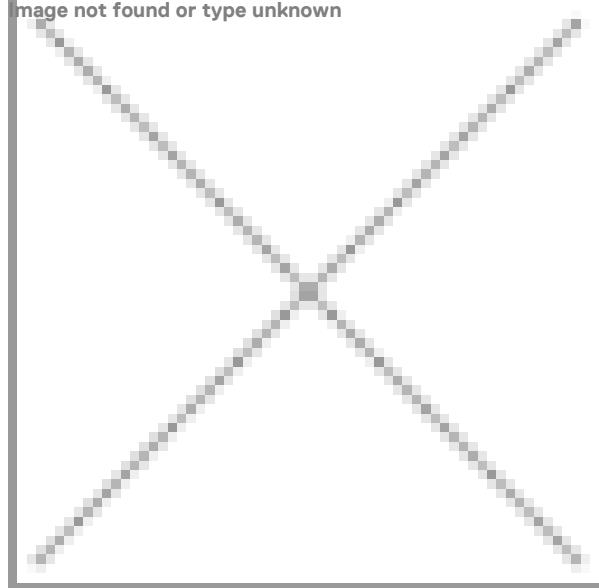
LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz
3000K
Light Source**Luminaire****Power****14W****17,1W****Flux****1290lm****980lm****Efficiency****92lm/W****57lm/W****LOR****-****76%****UGR****-****<13****Beam angle**
Flood 52°**Application****Weight**
0,5Kg

Image not found or type unknown

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class E
Model Identifier 4053560343L