


13W / 1290lm / 4000K / On/Off / Flood 52° /  
300mm

63417

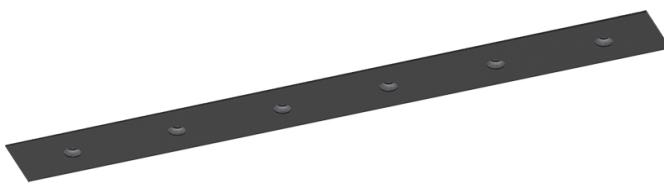

Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

**4000K**

**Light Source****Luminaire**


**Power** 13W **15,9W**

**Flux** 1700lm **1290lm**

**Efficiency** 131lm/W **81lm/W**

**LOR** - **76%**

**UGR** - **<16**



**Beam angle**  
**Flood 52°**



**Weight**  
**0,3Kg**

**Image not found or type unknown**

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class D  
Model Identifier 4053560345H