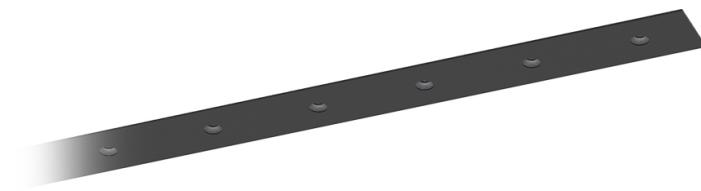


26W / 2580lm / 4000K / DALI / Flood 52° /
600mm

63441



Design: O/M + Bartenbach GmbH


Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

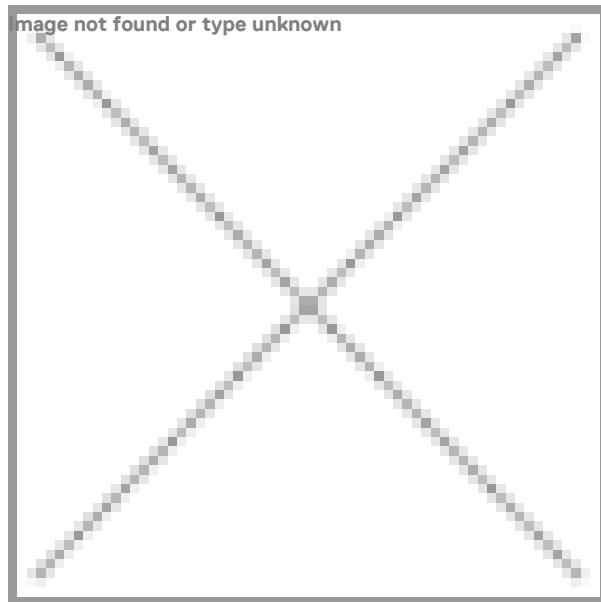
Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz
4000K

	Light Source	Luminaire
Power	26W	31,7W
Flux	3400lm	2580lm
Efficiency	131lm/W	81lm/W
LOR	-	76%
UGR	-	<16


Beam angle
Flood 52°

Weight
0,5Kg
**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains light sources of efficiency class D
Model Identifier 4053560345H