

5,6W / 410lm / 3000K / On/Off / Flood 56° /  
ø60mm

63461



Design: O/M + Bartenbach GmbH  
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
 Lightcore optics for defined and perfectly controlled beam of light.  
 Easy recessing system with spring clips.


LED CRI>90 / >50.000h, L80/B10  
 2-step MacAdam / Power supply included.  
 IP20 | 230Vac | 50/60Hz



LED 3000K

Light Source Luminaire

Power	5,6W	7W
Flux	460lm	410lm
Efficiency	82lm/W	59lm/W
LOR	-	89%
UGR	-	<19



Beam angle  
Flood 56°



Weight  
0,28Kg


mm

Ø53

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

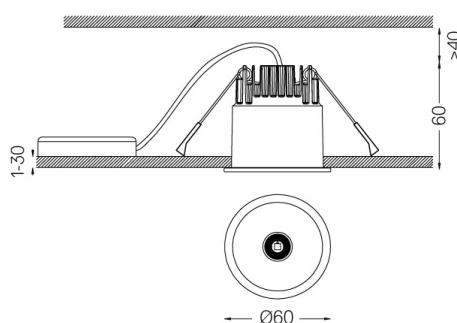

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains a light source of efficiency class G  
 Model Identifier 4053560290H