



## One Square

5,6W / 410lm / 2700K / DALI / Flood 56° /  
60x60mm

63487




Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Fitting accessories for different applications are available.

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



	2700K	Light Source	Luminaire
Power	5,6W	7W	
Flux	460lm	410lm	
Efficiency	82lm/W	59lm/W	
LOR	-	89%	
UGR	-	<19	



Beam angle  
Flood 56°



Weight  
0,30Kg

□ mm


△ 53x53

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

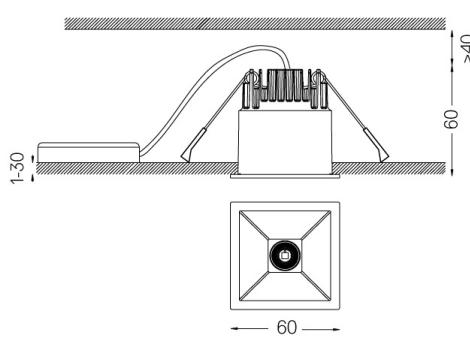

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560312H