



## One Square

5,6W / 430lm / 4000K / On/Off / Flood 56° /  
60x60mm

63493



Design: O/M + Bartenbach GmbH  
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
Lightcore optics for defined and perfectly controlled beam of light.  
Fitting accessories for different applications are available.

LED CRI>80 / >50.000h, L80/B10  
2-step MacAdam / Power supply included.  
IP20 | 230Vac | 50/60Hz



4000K

**Light Source**

**Luminaire**

**Power**

**5,6W**

**7W**

**Flux**

**490lm**

**430lm**

**Efficiency**

**88lm/W**


**61lm/W**

**LOR**

**88%**

**UGR**

**<19**



**Beam angle**  
**Flood 56°**

**Application**



**Weight**  
**0,30Kg**


mm

53x53

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

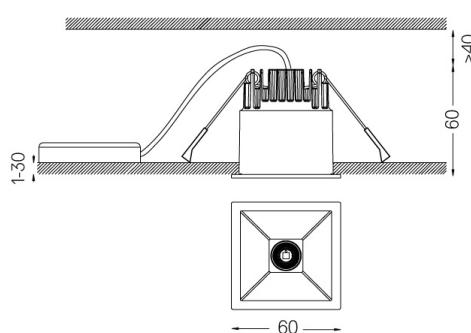

**Data according to regulations**

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains a light source of efficiency class G  
Model Identifier 4053560313H