



One Trimless

5,6W / 350lm / 2700K / On/Off / Medium
40° / ø54mm

63508



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



2700K

Light Source

Luminaire

Power

5,6W

7W

Flux

460lm

350lm

Efficiency

82lm/W


50lm/W

LOR

76%

UGR

<10



Beam angle
Medium 40°



Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59039 Trimless accessory (12.5mm ceilings)

155x18mm

59040 Trimless accessory (15mm ceilings)

155x20mm


59041 Trimless accessory (25mm ceilings)

155x30mm

Optional

59083 Removal tool

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

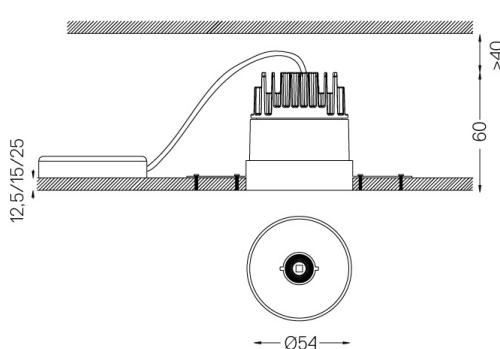

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560312H