



One Wallwisher Trimless

5,9W / 490lm / 2700K / DALI / Wallwisher /
ø54mm

63513




Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency.
Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



LED	2700K	Light Source	Luminaire
Power	5,9W	7,4W	
Flux	570lm	490lm	
Efficiency	97lm/W	66lm/W	
LOR	-	86%	
UGR	-	-	



Beam angle
Wallwisher



Weight

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59039 Trimless accessory (12.5mm ceilings)

155x18mm


59040 Trimless accessory (15mm ceilings)

155x20mm

59041 Trimless accessory (25mm ceilings)

155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

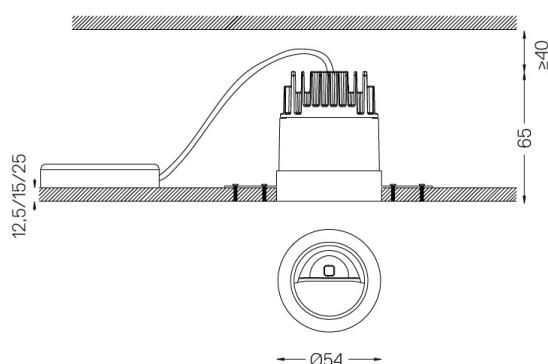

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier 4053560388