


3,1W / 230lm / 2700K / DALI / Flood 56° /  
39x39mm

63553

Design: O/M + Bartenbach GmbH  
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
 Lightcore optics for defined and perfectly controlled beam of light.  
 Recessing accessory supplied separately.




LED CRI>90 / >50.000h, L80/B10  
 2-step MacAdam / Power supply included.  
 IP20 | 230Vac | 50/60Hz



LED 2700K


Light Source Luminaire

Power	3,1W	4W
Flux	260lm	230lm
Efficiency	84lm/W	58lm/W
LOR	-	88%
UGR	-	<16

Beam angle  
Flood 56°

Weight

mm

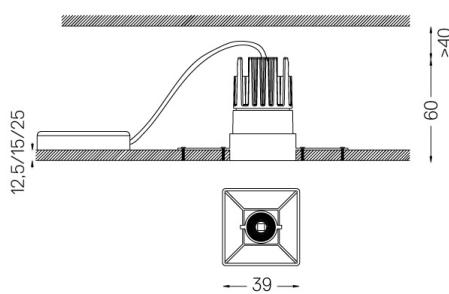

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59048 Trimless accessory (12.5mm ceilings)

140x18mm

59049 Trimless accessory (15mm ceilings)

140x20mm

59050 Trimless accessory (25mm ceilings)

140x30mm

For the specific supply of "DALI 2" drivers, please contact:  
 support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
 supplemented by 2021/340/EU Energy Consumption Labelling  
 Ordinance. This product contains a light source of efficiency class G  
 Model Identifier 4053560312L