

3,1W / 240lm / 4000K / DALI / Flood 56° /
39x39mm

63561



Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Lightcore optics for defined and perfectly controlled beam of light.
Recessing accessory supplied separately.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire

Power

3,1W

4W

Flux

280lm

240lm

Efficiency

90lm/W

60lm/W

LOR


-

86%

UGR

-

<16




Beam angle
Flood 56°

Application



Weight

mm

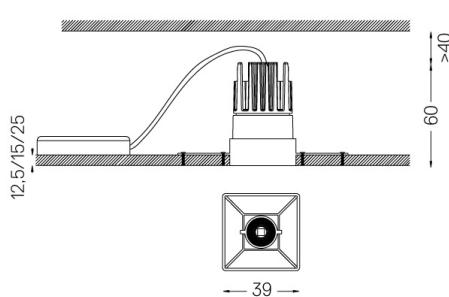

Finishes

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

Mandatory

59048 Trimless accessory (12.5mm ceilings)

140x18mm

59049 Trimless accessory (15mm ceilings)

140x20mm

59050 Trimless accessory (25mm ceilings)

140x30mm

For the specific supply of "DALI 2" drivers, please contact:
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
supplemented by 2021/340/EU Energy Consumption Labelling
Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560313L