One
Adjustable

5,6W / 215lm / 4000K / DALI / Spot 15° / ø60mm

63572

Design: O/M + Bartenbach GmbH
Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Orientable by 20° horizontal rotation.
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K	Light Source	Luminaire
Power	**5,6W**	**7W**
Flux	**480lm**	**215lm**
Efficiency	**86lm/W**	**31lm/W**
LOR	**-**	**45%**
UGR	**-**	**<10**



Beam angle
Spot 15°

Application

Weight
0,58Kg

mm

Ø54

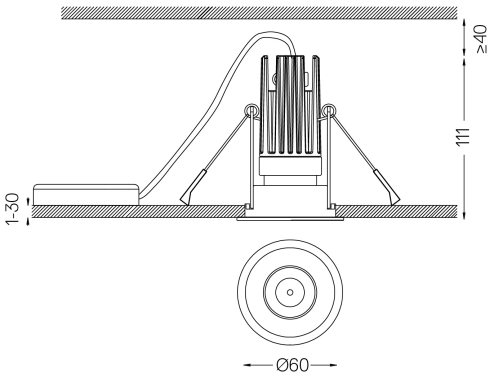

Finishes

○ **.01** White / RAL 9010
● **.02** Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com
The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class G
Model Identifier 4053560313H

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419