

5,6W / 410lm / 2700K / On/Off / Medium  
40° / ø54mm

63575




Design: O/M + Bartenbach GmbH  
 Ceiling-recessed luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.  
 Orientable by 20° horizontal rotation and 355° vertical rotation.  
 Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.  
 Recessing accessory supplied separately.

LED CRI>90 / >50.000h, L80/B10  
 2-step MacAdam / Power supply included.  
 IP20 | 230Vac | 50/60Hz



	2700K	Light Source	Luminaire
Power	5,6W	7W	
Flux	460lm	410lm	
Efficiency	82lm/W	59lm/W	
LOR	-	89%	
UGR	-	<19	



Beam angle  
**Medium 40°**



Weight  
**0,53Kg**

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

59039 Trimless accessory (12.5mm ceilings)

155x18mm


59040 Trimless accessory (15mm ceilings)

155x20mm

59041 Trimless accessory (25mm ceilings)

155x30mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

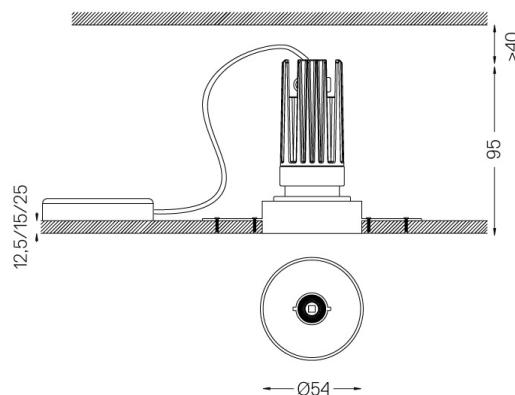

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560312H