One
Surface/Pendant

4,5W / 460lm / 4000K / On/Off / Medium
40° / ø85mm

63612

Design: O/M + Bartenbach GmbH
Surface/Pendant luminaire with aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish.
Spot-lens with individual complex surface rips to provide a focal light and an extremely narrow beam.
Fitting accessories ordered separately

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / Power supply included.
IP20 | 230Vac | 50/60Hz

LED 4000K	Light Source	Luminaire
Power	**4,5W**	**5,8W**
Flux	**620lm**	**460lm**
Efficiency	**138lm/W**	**80lm/W**
LOR	**-**	**74%**
UGR	**-**	**<10**



Beam angle
Medium 40°

Application

Weight
0,53Kg

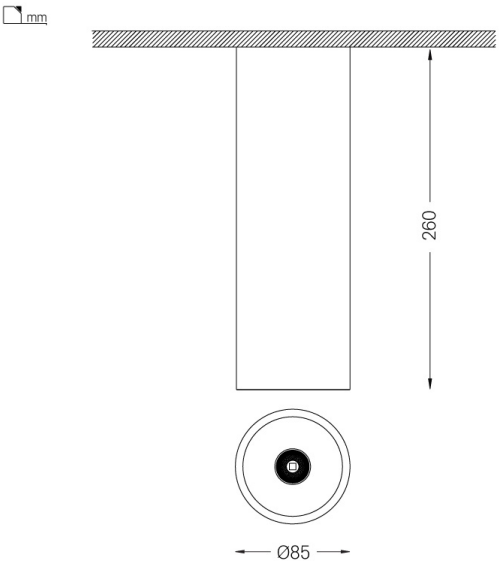

Finishes

- ○ **.01** White / RAL 9010
- ● **.02** Black / RAL 9005

Mandatory
59051 Accessory for pendant installation
ø80x35mm

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier 2053560257L

This page was generated on 2026-02-01. Click here for the latest version.

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419