
O/M

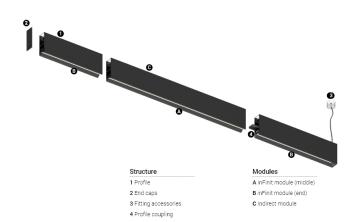

inFinit Made-to-measure

17+35W / 1800+1700lm / 4000K / DALI / Wide flood 76° / batwing / 1440mm

63783

Product timing available by request

Design: OM + Bartenbach GmbH

Pendant direct and indirect module with housing
made of aluminium with electrostatic 100% polyester
paint.


Direct light: Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam Power supply included. IP20 | 230Vac | 50/60Hz



Light Source	Luminaire
17+35W	20,7+41,2W
2250+2150lm	1800+1700lm
85lm/W	57lm/W
-	80%
-	<19
	17+35W 2250+2150lm 85lm/W



Beam angle
Wide flood 76° /
batwing

Application


Weight

Finishes

.04 Matt White.05 Matt Black

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com



mm