


27+56W / 2880+2720lm / 4000K / DALI /
Flood 64° / batwing / 2304mm

63784

Product timing available by request

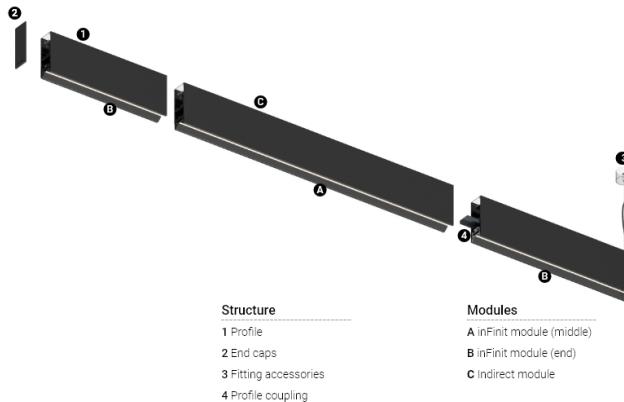

Design: OM + Bartenbach GmbH

Pendant direct and indirect module with housing made of aluminium with electrostatic 100% polyester paint.

Direct light: Linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

Indirect light: Linear lenses for batwing effect protected by a transparent polycarbonate diffuser.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire


Power 27+56W 32,9+65,9W

Flux 3600+3440lm 2880+2720lm

Efficiency 85lm/W 57lm/W

LOR - 80%

UGR - <16

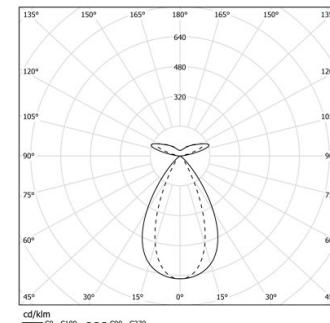

Beam angle
Flood 64° /
batwing

Application



Weight

mm


Finishes

- .04 Matt White
- .05 Matt Black

For the specific supply of "DALI 2" drivers, please contact:

support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

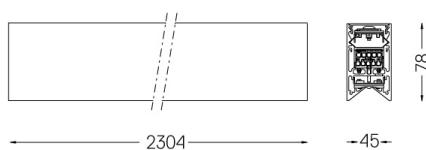

2304 -45-