

5,6W / 410lm / 2700K / DALI / Flood 59° /
ø45mm

64456



Design: O/M + Bartenbach GmbH

Recessed spotlight with die-cast aluminium body
with electrostatic 100% polyester paint finish.

Spot-lens with individual complex surface rips to
provide a focal light and an extremely narrow beam.
Oriental by 150° horizontal rotation and 330°
vertical rotation.


Driver included.

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / Driver included.
IP20 | 230Vac | 50/60Hz



2700K

	Light Source	Luminaire
Power	5,6W	7W
Flux	460lm	410lm
Efficiency	82lm/W	59lm/W
LOR	-	89%
Operating Condition	-	230Vac



Beam angle
Flood 59°




Weight
0,27Kg

mm

037

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

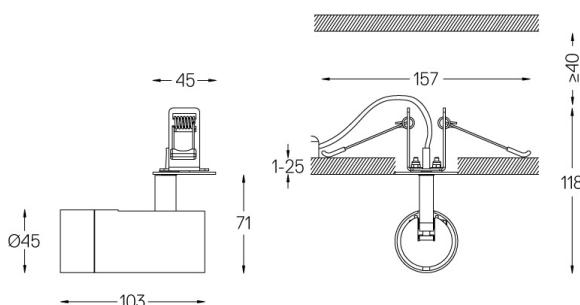

Optional

- 59072 1/4 CTO
ø35x1,1mm
- 59073 1/2 CTO
ø35x1,1mm
- 59074 Louvre
ø35x2mm
- 59075 Soft diffuser
ø35x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class G

Model Identifier 4053560312L