

66W / 9030lm / 3000K / DALI / Diffuse /  
ø850mm

64563

Design: O/M

Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.

Frosted acrylic diffuser with perfect light uniformity.

Recessing accessories supplied separately.


LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam

Power supply included.

IP43 | 230Vac | 50/60Hz



LED	3000K	Light Source	Luminaire
Power		66W	77,6W
Flux		11130lm	9030lm
Efficiency		169lm/W	116lm/W
LOR		-	81%
UGR		-	<25




Beam angle  
Diffuse

Application

Weight  
8,5Kg



Ø857

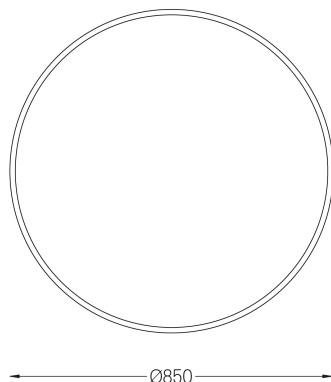

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

#### Mandatory

**59079** Recessed fitting accessory  
Ø858x958x134mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Recessed accessory for different ceiling heights under request

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class D  
Model Identifier 89603018