

66W / 9570lm / 4000K / On/Off / Diffuse /
ø850mm

64566

Design: O/M

Recessed luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions. Frosted acrylic diffuser with perfect light uniformity. Recessing accessories supplied separately.

LED: CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP43 | 230Vac | 50/60Hz



| LED | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power | | 66W | 77,6W |
| Flux | | 11800lm | 9570lm |
| Efficiency | | 179lm/W | 123lm/W |
| LOR | | - | 81% |
| UGR | | - | <25 |




Beam angle
Diffuse

Application

Weight
8,5Kg



Ø857

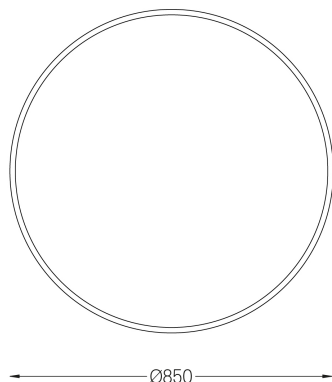

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Mandatory

59079 Recessed fitting accessory
Ø858x958x134mm

Recessed accessory for different ceiling heights under request

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class C
Model Identifier 89603019