



Sky Surface

21W / 2320lm / 4000K / On/Off / Diffuse /
ø400mm

64576



Design: O/M

Ceiling-mounted luminaire made of aluminium body with electrostatic 100% polyester paint with textured-finish suitable for adverse climate conditions.

Frosted acrylic diffuser with perfect light uniformity.

LED: CRI>80 />50.000h, L80/B10 / 3-step MacAdam
Power supply included.
IP43 | 230Vac | 50/60Hz



4000K

Light Source

Luminaire

Power

21W

26W

Flux

3430lm

2320lm

Efficiency

163lm/W

89lm/W

LOR


-

68%

UGR

-

<25




Beam angle
Diffuse

Application

Weight
4,5Kg

mm

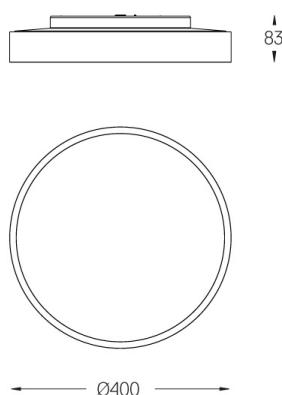

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

Data according to regulations

2019/2020/EU supplemented by 2021/341 |2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class C
Model Identifier 89603356