

66W / 9570lm / 4000K / On/Off / Diffuse /  
ø850mm

64578

Design: O/M

Ceiling-mounted luminaire made of aluminium body  
with electrostatic 100% polyester paint with  
textured-finish suitable for adverse climate  
conditions.

Frosted acrylic diffuser with perfect light uniformity.

LED: CRI&gt;80 / &gt;50.000h, L80/B10 / 3-step MacAdam

Power supply included.

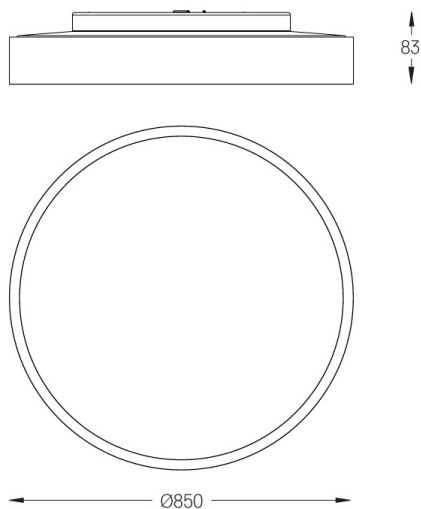
IP43 | 230Vac | 50/60Hz



| LED        | 4000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 66W          | 77,6W     |
| Flux       |       | 11800lm      | 9570lm    |
| Efficiency |       | 179lm/W      | 123lm/W   |
| LOR        |       | -            | 81%       |
| UGR        |       | -            | <25       |

Beam angle  
Diffuse

Application

Weight  
8,5Kg

## Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .03 Grey / RAL 9006

## Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU  
supplemented by 2021/340/EU Energy Consumption Labelling  
Ordinance. This product contains light sources of efficiency class C  
Model Identifier 89603019