

# O/M

## Go Adjustable

6,7W / 3,7W / 585lm / 330lm / 4000K / Spot  
20° / ø75mm

64781



Design: O/M  
Ceiling-recessed luminaire made of aluminium die-cast.  
Recessing system with spring clips.  
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10  
3-step MacAdam / Power supply not included  
IP44 | 180mA / 100mA



**4000K**

**Light Source**

**Luminaire**


**Power** **6,7W / 3,7W** **6,7W / 3,7W**

**Flux** **720lm / 400lm** **585lm / 330lm**

**Efficiency** **107lm/W** **87lm/W**

**LOR** **-** **81%**

**UGR** **-** **<16**



**Beam angle**  
**Spot 20°**

**Application**




**Weight**  
**0.21Kg**

□ mm

Ø 065

#### Finishes

- .04 Matt White
- .05 Matt Black

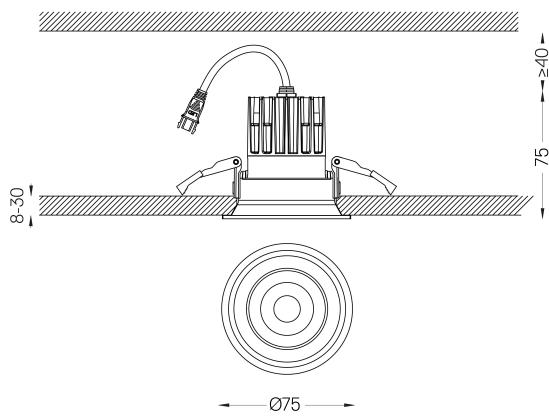

#### Mandatory

**59093** Driver On/Off [180mA]

147x43x30mm

**59092** Driver On/Off [100mA]

92x28x21mm

**59095** Driver DALI [180mA]

144x30x21mm

**59094** Driver DALI [100mA]

144x30x21mm

**59097** Driver Phase-Cut [180mA]

102x49x29mm

**59096** Driver Phase-Cut [100mA]

122x41x23mm

**59099** Driver 1-10V [180mA]

130x30x20mm

**59098** Driver 1-10V [120mA]

130x30x20mm

#### Optional

**59134** Flush accessory (12.5mm ceilings)

140x82x16,5mm

**59135** Flush accessory (15mm ceilings)

140x82x19,5mm

**59151** Louvre

ø35x4mm

**59152** Elliptical diffuser

ø35x4mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

#### Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class F

Model Identifier BXRH-40G1000-B-83