

10W / 5W / 1215lm / 610lm / 3000K / Spot
20° / ø100mm

64787




Design: O/M
 Ceiling-recessed luminaire made of aluminium die-cast.
 Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
 3-step MacAdam / Power supply not included
 IP44 | 300mA / 150mA



LED 3000K

	Light Source	Luminaire
Power	10W / 5W	10W / 5W
Flux	1540lm / 770lm	1215lm / 610lm
Efficiency	154lm/W	122lm/W
LOR	-	79%
UGR	-	<10




Beam angle
Spot 20°



Application
Weight
0.37Kg

□ mm

Ø 090

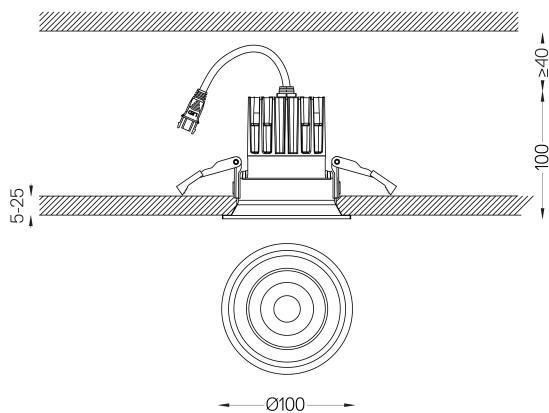

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59109 Driver On/Off [300mA]

147x43x30mm

59108 Driver On/Off [150mA]

147x43x30mm

59111 Driver DALI [300mA]

144x30x21mm

59110 Driver DALI [150mA]

144x30x21mm

59113 Driver PhaseCut [300mA]

102x51x30mm

59112 Driver PhaseCut [150mA]

102x49x29mm

59115 Driver 1-10V [300mA]

130x30x20mm

59114 Driver 1-10V [150mA]

130x30x20mm

Optional

59137 Flush accessory (12.5mm ceilings)

180x107x16,5mm

59138 Flush accessory (15mm ceilings)

180x107x19,5mm

59154 Louvre

ø45x4mm

59155 Elliptical diffuser

ø45x4mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU

supplemented by 2021/340/EU Energy Consumption Labelling

Ordinance. This product contains a light source of efficiency class E

Model Identifier BXRE-30G10FB-C-83