Go
IP65

3,7W / 300lm / 3000K / Flood 42° / ø50mm

64824

Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 100mA

LED 3000K	Light Source	Luminaire
Power	**3,7W**	**3,7W**
Flux	**395lm**	**300lm**
Efficiency	**107lm/W**	**81lm/W**
LOR	**-**	**76%**
UGR	**-**	**<16**



Beam angle
Flood 42°

Application

Weight
0.08Kg

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419

mm

Ø45

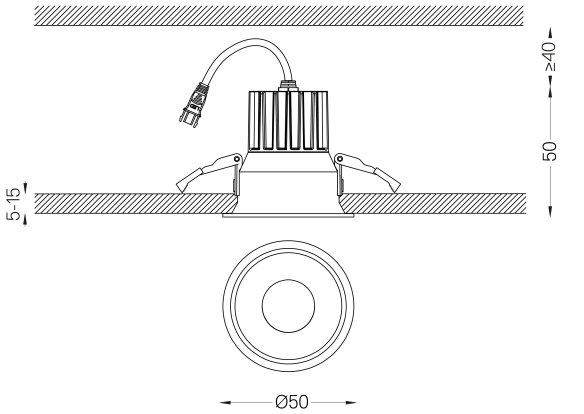

Finishes

○ **.04** Matt White
● **.05** Matt Black

Mandatory
59088 Driver On/Off [100mA]
138x30x21mm
59089 Driver DALI [100mA]
144x30x21mm
59090 Driver PhaseCut [100mA]
122x41x23mm
59091 Driver 1-10V [120mA]
130x30x20mm

Optional
59132 Flush accessory (12.5mm ceilings)
110X57X16,5mm
59133 Flush accessory (15mm ceilings)
110X57X19,5mm
59150 Frosted Glass
ø28x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class F
Model Identifier BXRH-30G1000-B-83

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419