Go
IP65

6,7W / 3,4W / 810lm / 405lm / 4000K / Flood 48° / ø75mm

64846

Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.
Recessing accessory for flush version supplied separately.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 200mA / 100mA

LED 4000K	Light Source	Luminaire
Power	**6,7W / 3,4W**	**6,7W / 3,4W**
Flux	**1065lm / 535lm**	**810lm / 405lm**
Efficiency	**159lm/W**	**121lm/W**
LOR	**-**	**76%**
UGR	**-**	**<19**



Beam angle
Flood 48°

Application

Weight
0.21Kg

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419

mm

Ø65

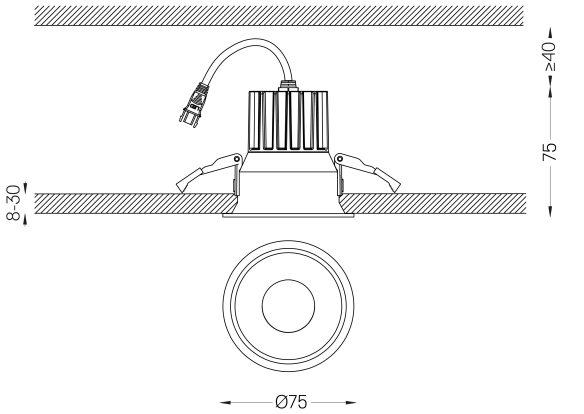

Finishes

○ **.04** Matt White
● **.05** Matt Black

Mandatory
59101 Driver On/Off [200mA]
147x43x30mm
59100 Driver On/Off [100mA]
110x40x21mm
59103 Driver DALI [200mA]
144x30x21mm
59102 Driver DALI [100mA]
144x30x21mm
59105 Driver PhaseCut [180mA]
102x49x29mm
59104 Driver PhaseCut [100mA]
122x41x23mm
59107 Driver 1-10V [200mA]
130x30x20mm
59106 Driver 1-10V [120mA]
130x30x20mm

Optional
59134 Flush accessory (12.5mm ceilings)
140x82x16,5mm
59135 Flush accessory (15mm ceilings)
140x82x19,5mm
59153 Frosted Glass
ø40x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRE-40G10FB-C-83

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419