Go
IP65

14W / 7W / 1755lm / 880lm / 3500K / Flood 60° / ø100mm

64856

Design: O/M
Ceiling-recessed luminaire made of aluminium die-cast.
Recessing system with spring clips.

LED CRI>90 / >50.000h, L80/B10
3-step MacAdam / Power supply not included
IP65 | 400mA / 200mA

LED 3500K	Light Source	Luminaire
Power	**14W / 7W**	**14W / 7W**
Flux	**2320lm / 1160lm**	**1755lm / 880lm**
Efficiency	**165lm/W**	**125lm/W**
LOR	**-**	**76%**
UGR	**-**	**<19**



Beam angle
Flood 60°

Application

Weight
0.37Kg

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419

mm

Ø90

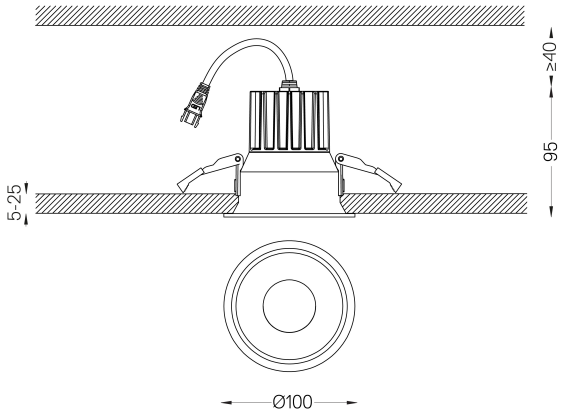

Finishes

○ **.04** Matt White
● **.05** Matt Black

Mandatory
59117 Driver On/Off [400mA]
147x43x30mm
59116 Driver On/Off [200mA]
147x43x30mm
59119 Driver DALI [400mA]
144x30x21mm
59118 Driver DALI [200mA]
144x30x21mm
59121 Driver PhaseCut [400mA]
111x22x52mm
59120 Driver PhaseCut [180mA]
102x49x29mm
59123 Driver 1-10V [400mA]
163x30x21mm
59122 Driver 1-10V [200mA]
130x30x20mm

Optional
59137 Flush accessory (12.5mm ceilings)
180x107x16,5mm
59138 Flush accessory (15mm ceilings)
180x107x19,5mm
59156 Frosted Glass
ø52x2mm

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com
The 5-year guarantee applies only when the luminaire and driver are supplied together.

Data according to regulations
2019/2020/EU supplemented by 2021/341 |2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E
Model Identifier BXRE-35G20FB-C-83

www.om-light.com / mail@om-light.com Rua Maurício Lourenço Oliveira 186, 4405-034 Vila Nova de Gaia, Porto. Portugal. / Apartado 1538 4401-901 Vila Nova de Gaia, Porto Portugal / tel. +351 223 710 419