


22W / 2040lm / 4000K / DALI / Wide flood
76° / 1256mm

64909

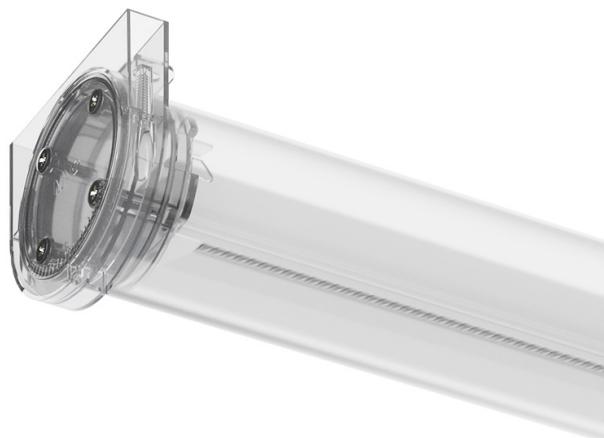


Design: Eduardo Souto de Moura
 Surface luminaire with tubular semi frosted PMMA body with 70mm diameter.
 Clear polycarbonate end caps with marked installation angles.
 Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
 Equipped with 2m cable (5x0.75 mm²).
 Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
 Power supply included.
 IP44 | 230Vac | 50/60Hz



| | | | |
|-------------------|----------------|---------------------|------------------|
| | 4000K | Light Source | Luminaire |
| Power | 22W | 25,9W | |
| Flux | 3000lm | 2040lm | |
| Efficiency | 142lm/W | 79lm/W | |
| LOR | - | 68% | |
| UGR | - | <16 | |



| |
|--------------------|
| Application |
| |

Weight

mm

Finishes

.01 White / RAL 9010

Mandatory

43707 Surface fitting accessory

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains light sources of efficiency class E
 Model Identifier 4053560084

