

6,3W / 250lm / 2700K / DALI / Spot 17° /  
150mm

65019




Design: O/M + Bartenbach GmbH

Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.  
Focal-lens with complex surface and individual complex surface ribs to provide a focal point through an aperture for glare free area illumination.  
Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 6,3W         | 7,9W      |
| Flux       |       | 565lm        | 250lm     |
| Efficiency |       | 90lm/W       | 32lm/W    |
| LOR        |       | -            | 44%       |
| UGR        |       | -            | <10       |




Beam angle  
Spot 17°

Application



Weight  
0,22Kg

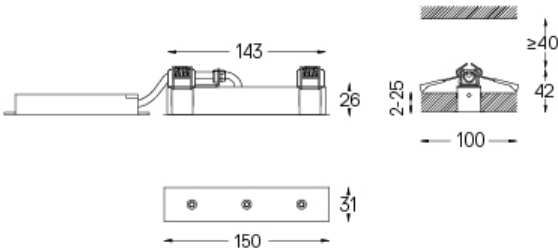

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com