

38W / 1485lm / 2700K / On/Off / Spot 17° /  
900mm

65143



Design: O/M + Bartenbach GmbH


Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz

**2700K**

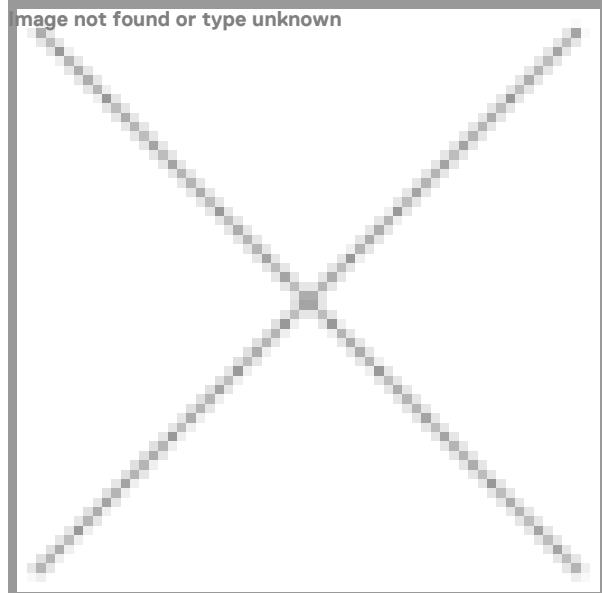
**Light Source****Luminaire****Power****38W****44,5W****Flux****3375lm****1485lm****Efficiency****-****-****LOR****-****-****UGR****-****-**

**Beam angle**  
**Spot 17°**



**Weight**  
**0,55Kg**

Image not found or type unknown

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com