

Design: O/M + Bartenbach GmbH


Luminaire with housing of aluminium profile with electrostatic 100% polyester paint with textured-finish.

Focal-lens with complex surface and individual complex surface rips to provide a focal point through an aperture for glare free area illumination.

Special springs available on request.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz

2700K

Light Source**Luminaire****Power****26W****30,7W****Flux****2250lm****990lm****Efficiency****-****-****LOR****-****-****UGR****-****-**

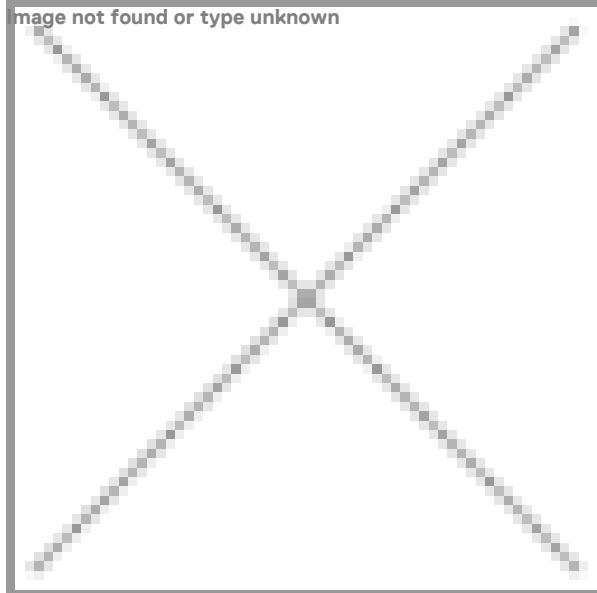
Beam angle
Spot 17°

Application



Weight
0,5Kg

Image not found or type unknown

**Finishes**

- .01 White / RAL 9010**
- .02 Black / RAL 9005**

For the specific supply of "DALI 2" drivers, please contact:

support@om-light.com

The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com