


38W / 1485lm / 2700K / On/Off / Spot 17° /  
911mm

65335

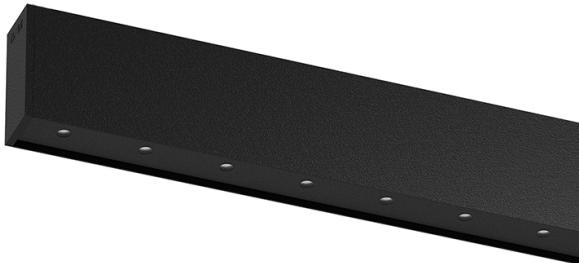

Design: O/M + Bartenbach GmbH  
Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision35 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source.

Fitting accessories for pendant version ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



2700K

Light Source Luminaire


Power 38W 44,5W

Flux 3375lm 1485lm

Efficiency 89lm/W 33lm/W

LOR - 44%

UGR - <10



Beam angle  
Spot 17°

Application



Weight  
1,8Kg

mm

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory  
54034 Clear Base  
ø60x35mm

