


19W / 795lm / 2700K / DALI / Spot 17° /  
900mm

65418

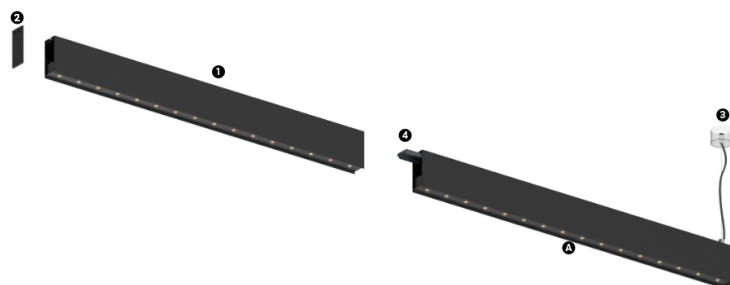

#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

- A inVision Module


Design: O/M + Bartenbach GmbH

inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 2700K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 19W          | 23W       |
| Flux       |       | 1810lm       | 795lm     |
| Efficiency |       | 96lm/W       | 34lm/W    |
| LOR        |       | -            | 44%       |
| UGR        |       | -            | <10       |




Beam angle  
Spot 17°

#### Application



Weight  
0,6Kg

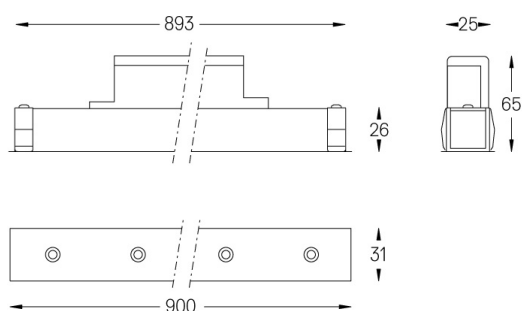

#### Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com