


38W / 1485lm / 2700K / DALI / Spot 17° /  
900mm

65419

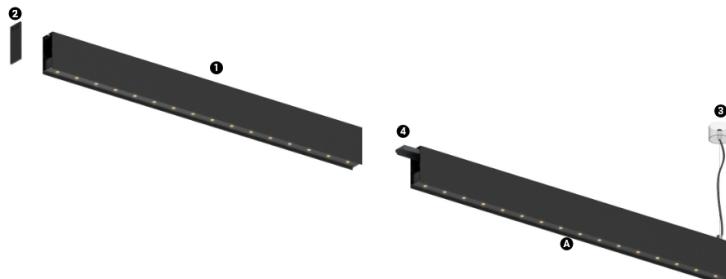

**Structure**  
1 Profile  
2 End caps  
3 Fitting accessories  
4 Profile coupling

**Modules**  
A inVision Module

Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



**2700K**

**Light Source** **Luminaire**

<b>Power</b>	<b>38W</b>	<b>44,5W</b>
<b>Flux</b>	<b>3375lm</b>	<b>1485lm</b>
<b>Efficiency</b>	<b>89lm/W</b>	<b>33lm/W</b>
<b>LOR</b>	-	<b>44%</b>
<b>UGR</b>	-	<b>&lt;10</b>



**Beam angle**  
**Spot 17°**

**Application**



**Weight**  
**0,6Kg**

mm

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com

