

13W / 565lm / 3000K / DALI / Spot 17° / 600mm

65654



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules


- A inVision Module

Design: O/M + Bartenbach GmbH  
inVision module with housing and perforated cover plate made of aluminium with textured-paint finish.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 3000K | Light Source | Luminaire |
|------------|-------|--------------|-----------|
| Power      |       | 13W          | 15,4W     |
| Flux       |       | 1285lm       | 565lm     |
| Efficiency |       | 102lm/W      | 37lm/W    |
| LOR        |       | -            | 44%       |
| UGR        |       | -            | <10       |




Beam angle  
Spot 17°

#### Application



Weight  
0,5Kg

mm

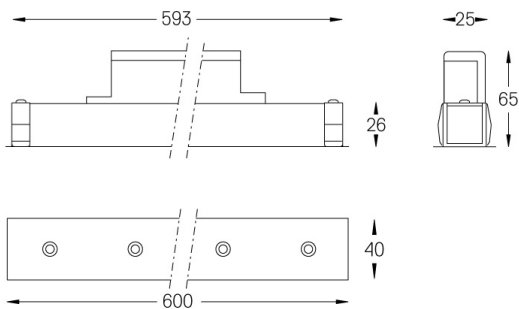

#### Finishes

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: support@om-light.com