

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 230Vac | 50/60Hz




LED	3000K	Fuente de luz	LLuminaria
Potencia	26W		32W
Flujo	2580lm		1960lm
Eficiencia	99lm/W		61lm/W
LOR	-		0.7596899224806202
UGR	-		<16



Ángulo de haz
Flood 50°

Aplicación

Peso
0,5Kg

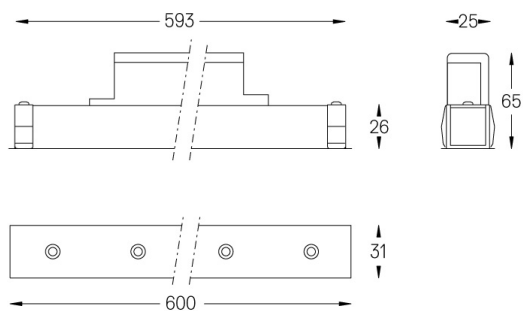

Acabados

- .01 Blanco/RAL 9010
- .02 Negro/RAL 9005