

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 4000K | Source lumineuse | Luminaire |
|------------|-------|------------------|-----------|
| Puissance  |       | 23W              | 27W       |
| Flux       |       | 3250lm           | 2600lm    |
| Efficacité |       | 141lm/W          | 96lm/W    |
| LOR        |       | -                | 0.8       |
| UGR        |       | -                | <16       |



Angle du faisceau  
Flood 65°

Application

Poids

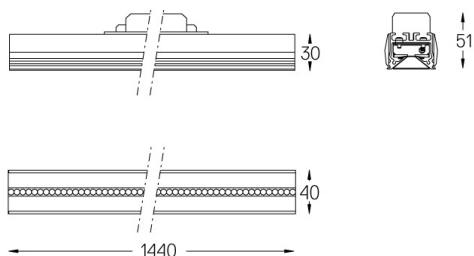

Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005