


16W* / 710lm* / 2200K-5000K / DALI /
Asymmetric / 600mm


61255

Design: O/M + Bartenbach GmbH

LED CRI>80 / >50.000h, L80/B10
2-step MacAdam / power supply included.
DALI DT8
IP20 | 230Vac | 50/60Hz

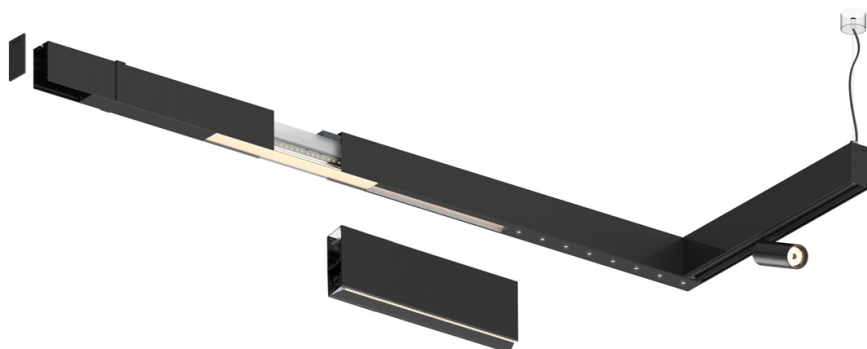



LED	2200K-5000K	Source lumineuse	Luminaire
Puissance	16W*		19W*
Flux	1550lm*		710lm*
Efficacité	97lm/W		37lm/W
LOR	-		46%
UGR	-		-



Angle du faisceau
Asymmetric

Application

Poids



Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005
- .03 Gris / RAL 9006