


34W* / 3480lm* / 2200K-5000K / DALI /
Flood 64° / 1728mm

61241

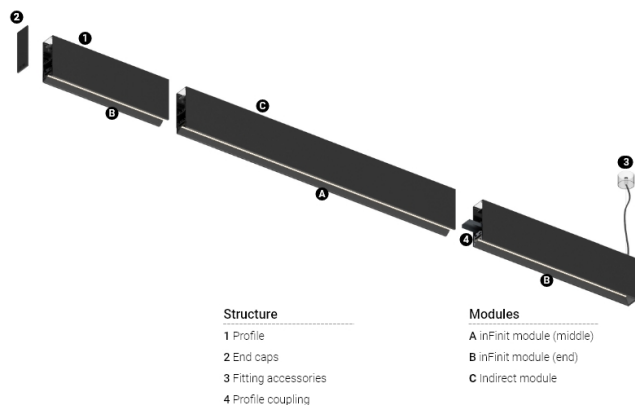

Design: OM + Bartenbach

GmbH

Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

2200-5000K Tunable White.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Fonte de alimentação incluída.

IP20 | 230Vac | 50/60Hz




LED	2200K-5000K	Fonte de Luz	Luminária
Potência	34W*		39,5W*
Fluxo	4380lm*		3480lm*
Eficiência	130lm/W		88lm/W
LOR	-		79%
UGR	-		<16

Ângulo de abertura
Flood 64°

Aplicação



Peso

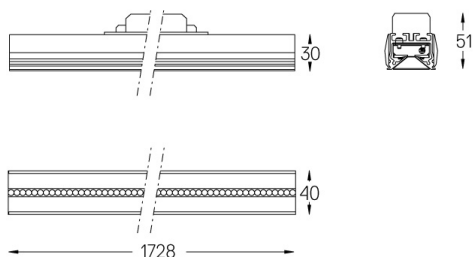

Acabamentos

- .01 Branco / RAL 9010
- .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar:
support@om-light.com

Escolha o comprimento e a configuração do sistema exactamente como pretende, para modelar as funções de iluminação certas para diferentes tarefas. Para mais informações, contacte: support@om-light.com